



TORQUE SYSTEM

>>> HEX〔ヘキサゴン〕ソケット寸法表 / type- H2:7/8

HEX ビットホルダー〔inch〕



		製品型式	D	d	L	I	重量
inch	inch		mm	mm	mm	mm	kg
3/4	7/8	H2:7/8	44	44	55	35	0.46

HEX インサートビット〔mm〕

		製品型式	L	I	重量
mm	inch		mm	mm	kg
10	7/8	7/8:10	44	10	0.10
12	7/8	7/8:12	44	13	0.11
14	7/8	7/8:14	44	14	0.11
16	7/8	7/8:16	44	16	0.12
17	7/8	7/8:17	44	16	0.12
18	7/8	7/8:18	44	18	0.13
19	7/8	7/8:19	44	18	0.13
20	7/8	7/8:20	44	18	0.14
22	7/8	7/8:22	44	18	0.15
24	7/8	7/8:24	44	19	0.16

HEX インサートビット〔inch〕

		製品型式	inch→mm換算		L	I	重量
inch	inch		inch	mm	mm	mm	kg
3/8	7/8	7/8:3/8	3/8	9.53	44	10	0.10
1/2	7/8	7/8:1/2	1/2	12.70	44	13	0.11
9/16	7/8	7/8:9/16	9/16	14.29	44	14	0.11
5/8	7/8	7/8:5/8	5/8	15.88	44	16	0.12
11/16	7/8	7/8:11/16	11/16	17.46	44	16	0.12
3/4	7/8	7/8:3/4	3/4	19.05	44	18	0.13
13/16	7/8	7/8:13/16	13/16	20.64	44	18	0.14
7/8	7/8	7/8:7/8	7/8	22.23	44	18	0.15
1	7/8	7/8:1	1	25.40	44	19	0.17

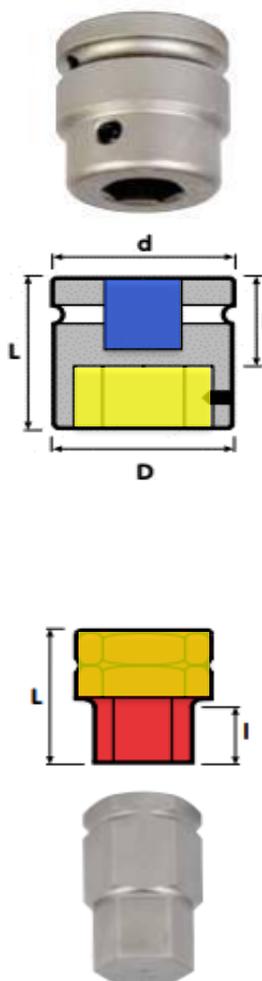



TORQUE SYSTEM

>>> HEX〔ヘキサゴン〕ソケット寸法表 / type- **H9:7/8**

HEX ビットホルダー〔inch〕



		製品型式	D	d	L	I	重量
inch	inch		mm	mm	mm	mm	kg
1	7/8	H9:7/8	48	54	60	40	0.70

HEX インサートビット〔mm〕

		製品型式	L	I	重量
mm	inch		mm	mm	kg
10	7/8	7/8:10	44	10	0.10
12	7/8	7/8:12	44	13	0.11
14	7/8	7/8:14	44	14	0.11
16	7/8	7/8:16	44	16	0.12
17	7/8	7/8:17	44	16	0.12
18	7/8	7/8:18	44	18	0.13
19	7/8	7/8:19	44	18	0.13
20	7/8	7/8:20	44	18	0.14
22	7/8	7/8:22	44	18	0.15
24	7/8	7/8:24	44	19	0.16

HEX インサートビット〔inch〕

		製品型式	inch→mm換算		L	I	重量
inch	inch		inch	mm	mm	mm	kg
3/8	7/8	7/8:3/8	3/8	9.53	44	10	0.10
1/2	7/8	7/8:1/2	1/2	12.70	44	13	0.11
9/16	7/8	7/8:9/16	9/16	14.29	44	14	0.11
5/8	7/8	7/8:5/8	5/8	15.88	44	16	0.12
11/16	7/8	7/8:11/16	11/16	17.46	44	16	0.12
3/4	7/8	7/8:3/4	3/4	19.05	44	18	0.13
13/16	7/8	7/8:13/16	13/16	20.64	44	18	0.14
7/8	7/8	7/8:7/8	7/8	22.23	44	18	0.15
1	7/8	7/8:1	1	25.40	44	19	0.17

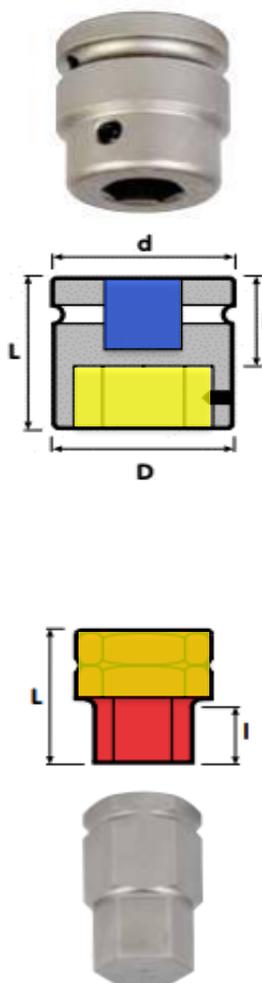



TORQUE SYSTEM

>>> HEX [ヘキサゴン] ソケット 寸法表 / type- **H9:1-1/4**

HEX ビットホルダー [inch]



		製品型式	D	d	L	I	重量
inch	inch		mm	mm	mm	mm	kg
1	1-1/4	H9:1-1/4	63	54	75	45	1.20

HEX インサートビット [mm]

		製品型式	L	I	重量
mm	inch		mm	mm	kg
19	1-1/4	1-1/4:19	60	22	0.30
22	1-1/4	1-1/4:22	60	22	0.32
24	1-1/4	1-1/4:24	60	22	0.34
27	1-1/4	1-1/4:27	60	22	0.36
30	1-1/4	1-1/4:30	60	28	0.38
32	1-1/4	1-1/4:32	65	30	0.41
33	1-1/4	1-1/4:33	65	30	0.42
36	1-1/4	1-1/4:36	65	30	0.50

HEX インサートビット [inch]

		製品型式	inch→mm換算		L	I	重量
inch	inch		inch	mm	mm	mm	kg
1	1-1/4	1-1/4:1	1	25.40	60	22	0.34
1-1/16	1-1/4	1-1/4:1-1/16	1-1/16	26.99	60	22	0.36
1-1/8	1-1/4	1-1/4:1-1/8	1-1/8	28.58	60	28	0.37
1-3/16	1-1/4	1-1/4:1-3/16	1-3/16	30.16	60	25	0.39
1-1/4	1-1/4	1-1/4:1-1/4	1-1/4	31.75	65	30	0.41
1-5/16	1-1/4	1-1/4:1-5/16	1-5/16	33.34	60	25	0.43

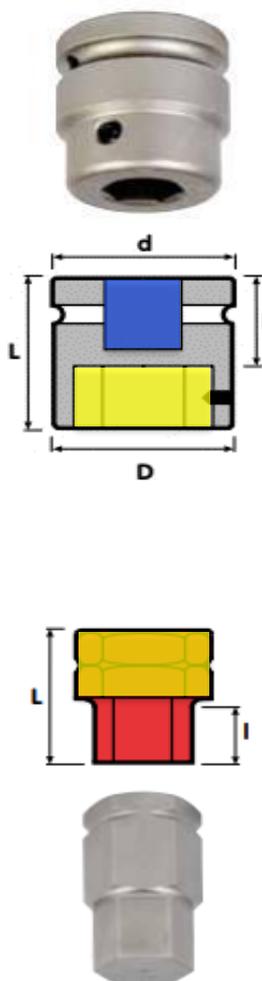



TORQUE SYSTEM

>>> HEX〔ヘキサゴン〕ソケット寸法表 / type- **H5:1-1/4**

HEX ビットホルダー〔inch〕




		製品型式	D	d	L	I	重量
inch	inch		mm	mm	mm	mm	kg
1-1/2	1-1/4	H5:1-1/4	68	84	88	58	2.33

HEX インサートビット〔mm〕

		製品型式	L	I	重量
mm	inch		mm	mm	kg
19	1-1/4	1-1/4:19	60	22	0.30
22	1-1/4	1-1/4:22	60	22	0.32
24	1-1/4	1-1/4:24	60	22	0.34
27	1-1/4	1-1/4:27	60	22	0.36
30	1-1/4	1-1/4:30	60	28	0.38
32	1-1/4	1-1/4:32	65	30	0.41
33	1-1/4	1-1/4:33	65	30	0.42
36	1-1/4	1-1/4:36	65	30	0.50

HEX インサートビット〔inch〕

		製品型式	inch→mm換算		L	I	重量
inch	inch		inch	mm	mm	mm	kg
1	1-1/4	1-1/4:1	1	25.40	60	22	0.34
1-1/16	1-1/4	1-1/4:1-1/16	1-1/16	26.99	60	22	0.36
1-1/8	1-1/4	1-1/4:1-1/8	1-1/8	28.58	60	28	0.37
1-3/16	1-1/4	1-1/4:1-3/16	1-3/16	30.16	60	25	0.39
1-1/4	1-1/4	1-1/4:1-1/4	1-1/4	31.75	65	30	0.41
1-5/16	1-1/4	1-1/4:1-5/16	1-5/16	33.34	60	25	0.43





TORQUE SYSTEM

>>> HEX [ヘキサゴン] ソケット 寸法表 / type- **H5:1-3/4**

HEX ビットホルダー [inch]

		製品型式	D	d	L	I	重量
inch	inch		mm	mm	mm	mm	kg
1-1/2	1-3/4	H5:1-3/4	84	84	110	70	3.24

HEX インサートビット [mm]

		製品型式	L	I	重量
mm	inch		mm	mm	kg
36	1-3/4	1-3/4:36	80	38	0.90
41	1-3/4	1-3/4:41	80	38	0.64
46	1-3/4	1-3/4:46	85	40	1.17
50	1-3/4	1-3/4:50	85	40	1.36

HEX インサートビット [inch]

		製品型式	inch→mm換算		L	I	重量
inch	inch		inch	mm	mm	mm	kg
1-3/8	1-3/4	1-3/4:1-3/8	1-3/8	9.53	80	30	0.47
1-1/2	1-3/4	1-3/4:1-1/2	1-1/2	38.10	80	38	0.94
1-5/8	1-3/4	1-3/4:1-5/8	1-5/8	41.28	80	38	0.98
1-3/4	1-3/4	1-3/4:1-3/4	1-3/4	44.45	80	38	1.06
1-7/8	1-3/4	1-3/4:1-7/8	1-7/8	47.63	85	40	0.90
2	1-3/4	1-3/4:2	2	50.80	90	45	1.40